


# ŠVESTKA

DEMOLICE • ZEMNÍ PRÁCE • NADROZMĚRNÁ PŘEPRAVA • MOBILNÍ JEŘÁBY • DOPRAVA • RECYKLACE

CAT 963 B

## Dimensions

All dimensions are approximate.

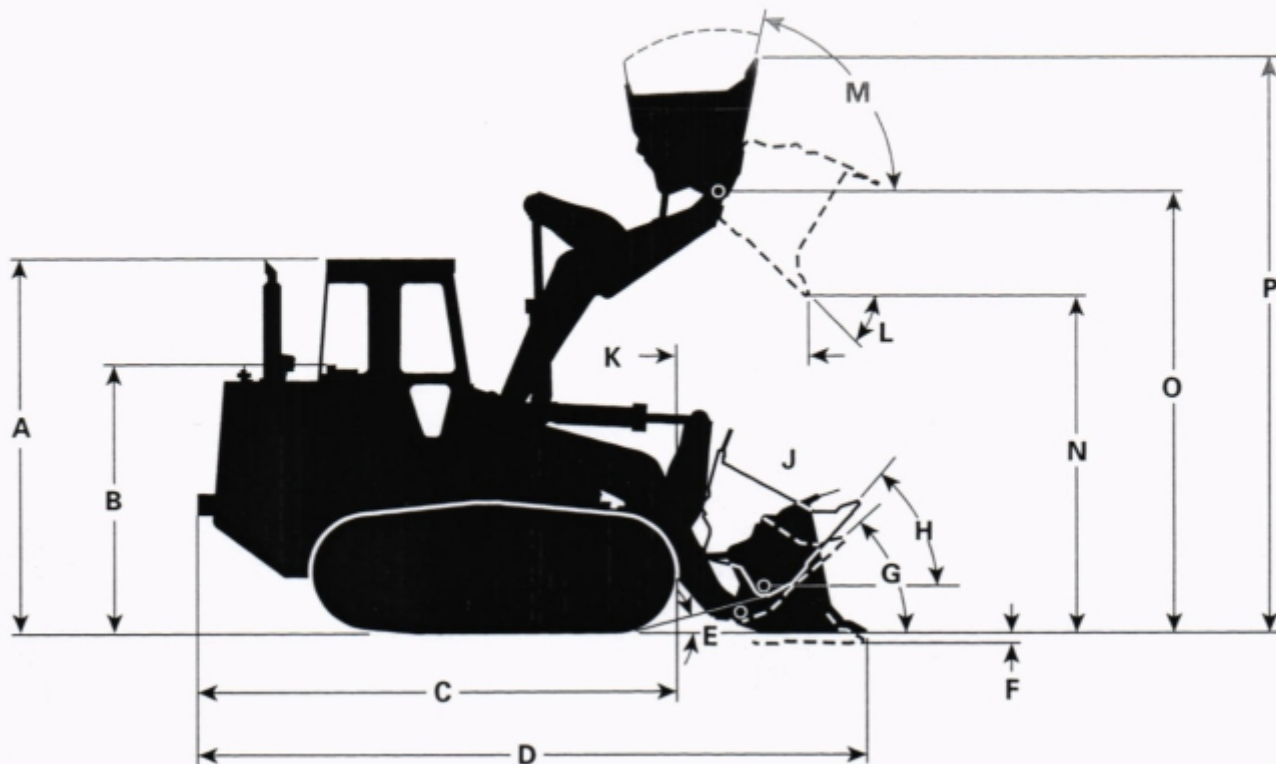

	Standard Track	Wide Track
Overall machine width without bucket	2300 mm	2400 mm
Ground clearance from face of shoe	439 mm	439 mm
Grading angle	68°	68°
<b>A</b> Machine height to top of cab	3308 mm	3308 mm
<b>B</b> Height to top of seat without headrest	2513 mm	2513 mm
<b>C</b> Length to front of track	4630 mm	4630 mm
<b>D</b> Overall machine length	*	*
<b>E</b> Carry position approach angle	15°	15°
<b>F</b> Digging depth	*	*
<b>G</b> Maximum rollback at ground	43°	43°
<b>H</b> Maximum rollback at carry position	50°	50°
<b>J</b> Bucket in carry position	-	-
<b>K</b> Reach at full lift height	*	*
<b>L</b> S.A.E. specified dump angle	45° (46° max.)	45° (46° max.)
<b>M</b> Maximum rollback, fully raised	59°	59°
<b>N</b> Dump clearance at full lift height and 45° discharge	*	*
<b>O</b> Height to bucket hinge pin	3929 mm	3929 mm
<b>P</b> Overall machine height, bucket fully raised	*	*

\* Dimensions vary with bucket. Refer to operating specifications chart on page 13.