


ŠVESTKA

DEMOLICE · ZEMNÍ PRÁCE · NADROZMĚRNÁ PŘEPRAVA · MOBILNÍ JEŘÁBY · DOPRAVA · RECYKLACE

PC450LC-7

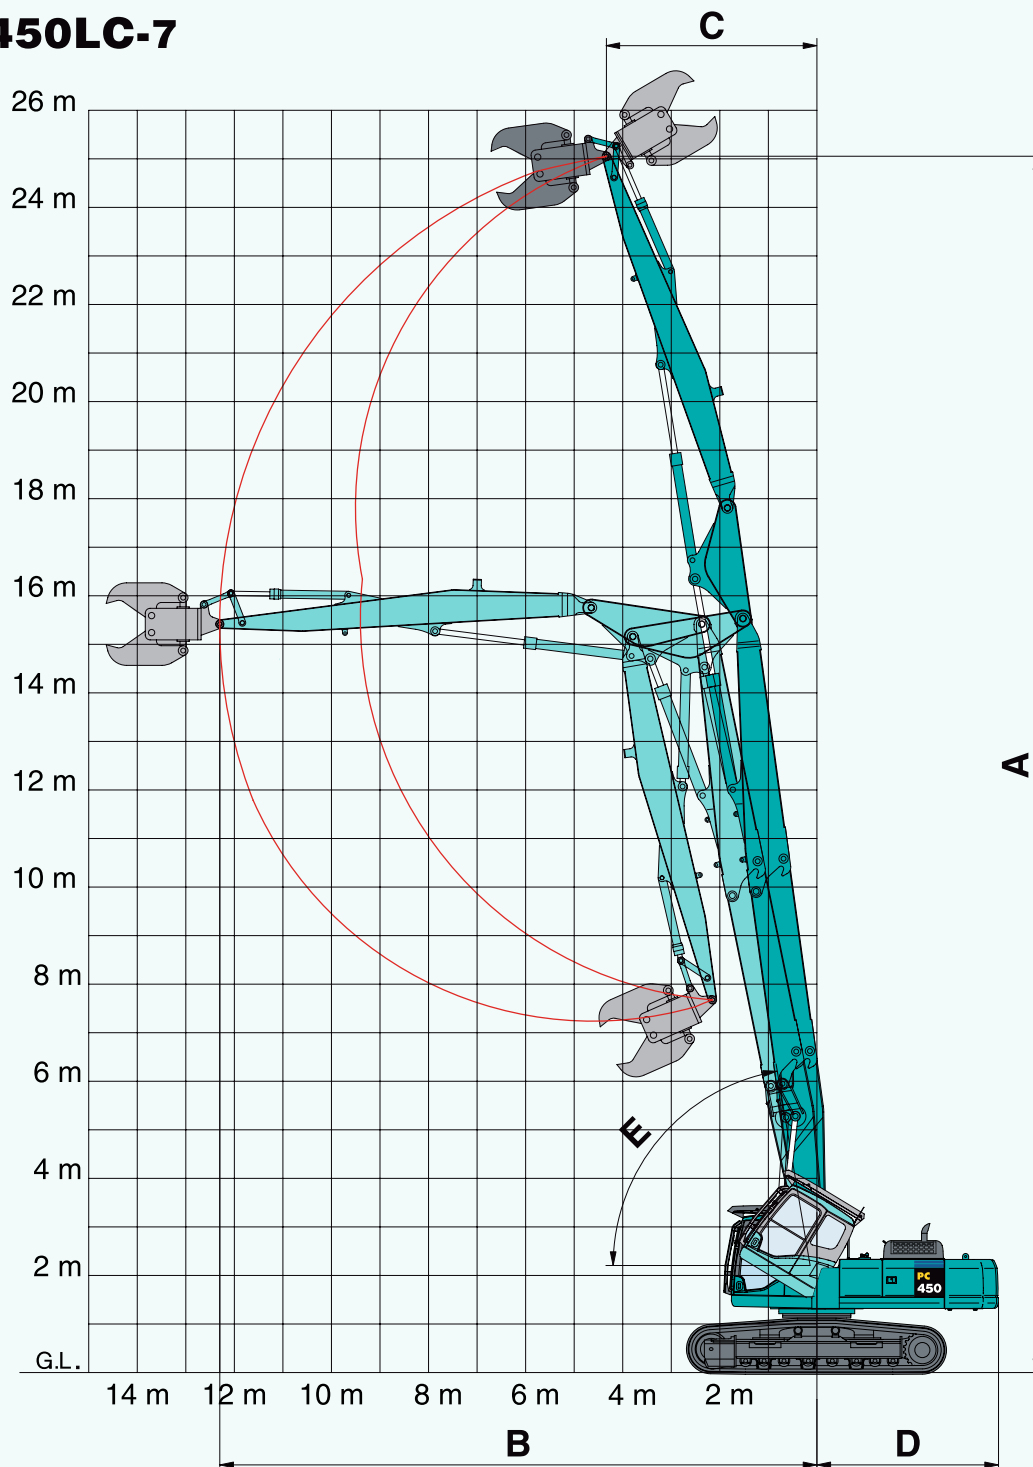

HIGH REACH CONFIGURATION		
A	Max. working height	25.050 mm
B	Forward-limit working range	12.300 mm
C	Top pin reach at max. height	4.340 mm
D	Tail swing radius	3.740 mm
E	Minimum boom angle	80°

This working range is applicable through 360 degrees (depending upon fitted attachment). For operator and jobsite safety, Komatsu recommend that high reach demolition machines work in line with the trackframe where ever possible.