
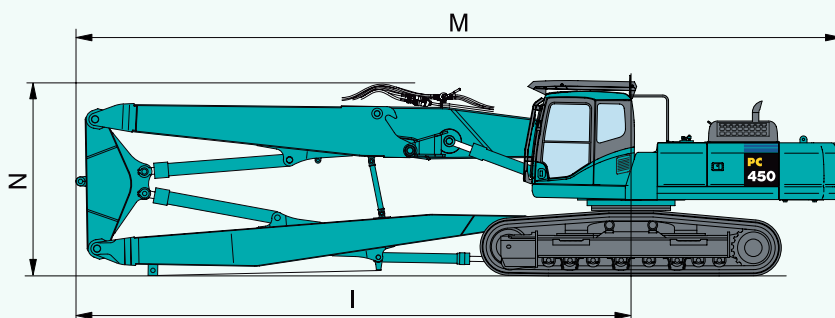
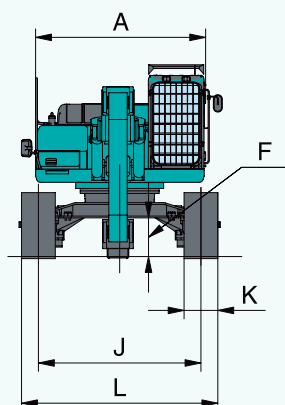


ŠVESTKA

DEMOLICE • ZEMNÍ PRÁCE • NADROZMĚRNÁ PŘEPRAVA • MOBILNÍ JEŘÁBY • DOPRAVA • RECYKLACE

PC450LC-7

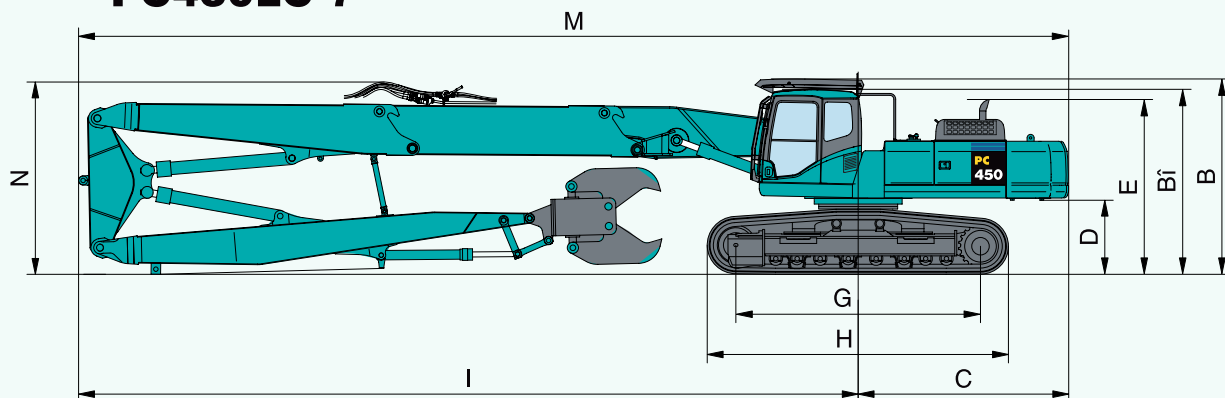

TRANSPORT DIMENSIONS		MEDIUM REACH	HIGH REACH
A	Overall width of upper structure ¹⁾	2.995 mm	2.995 mm
B	Overall height of cab (including FOPS)	3.485 mm	3.485 mm
B'	Overall height of cab (not including FOPS)	3.265 mm	3.265 mm
C	Tail length	3.705 mm	3.705 mm
D	Clearance under counterweight	1.320 mm	1.320 mm
E	Machine tail height	3.107 mm	3.107 mm
F	Ground clearance	685 mm	685 mm
G	Track length on ground (standard undercarriage)	4.350 mm	4.350 mm
	Track length on ground (HWG undercarriage)	4.315 mm	4.315 mm
H	Track length	5.355 mm	5.355 mm
I	Swing centre to front distance	9.865 mm	13.870 mm
J	Track gauge (standard undercarriage) ²⁾	2.390 - 2.890 mm	2.390 - 2.890 mm
	Track gauge (HWG undercarriage) ²⁾	2.280 - 3.130 mm	2.280 - 3.130 mm
K	Track shoe width	600 mm, 700 mm	600 mm, 700 mm
L	Overall track width with 600 mm shoes (standard undercarriage) ²⁾	2.990 - 3.490 mm	2.990 - 3.490 mm
	Overall track width with 700 mm shoes (standard undercarriage) ²⁾	3.090 - 3.590 mm	3.090 - 3.590 mm
	Overall track width with 600 mm shoes (HWG undercarriage) ²⁾	2.880 - 3.730 mm	2.880 - 3.730 mm
	Overall track width with 700 mm shoes (HWG undercarriage) ²⁾	2.980 - 3.830 mm	2.980 - 3.830 mm
M	Transport length	13.570 mm	17.610 mm
N	Maximum boom height	3.410 mm	3.420 mm

¹⁾ Overall width of upper structure excludes side guards, handrails and mirrors.

²⁾ Frame in retracted - extended position.