


ŠVESTKA

DEMOLICE • ZEMNÍ PRÁCE • NADROZMĚRNÁ PŘEPRAVA • MOBILNÍ JEŘÁBY • DOPRAVA • RECYKLACE

LIEBHERR A 916

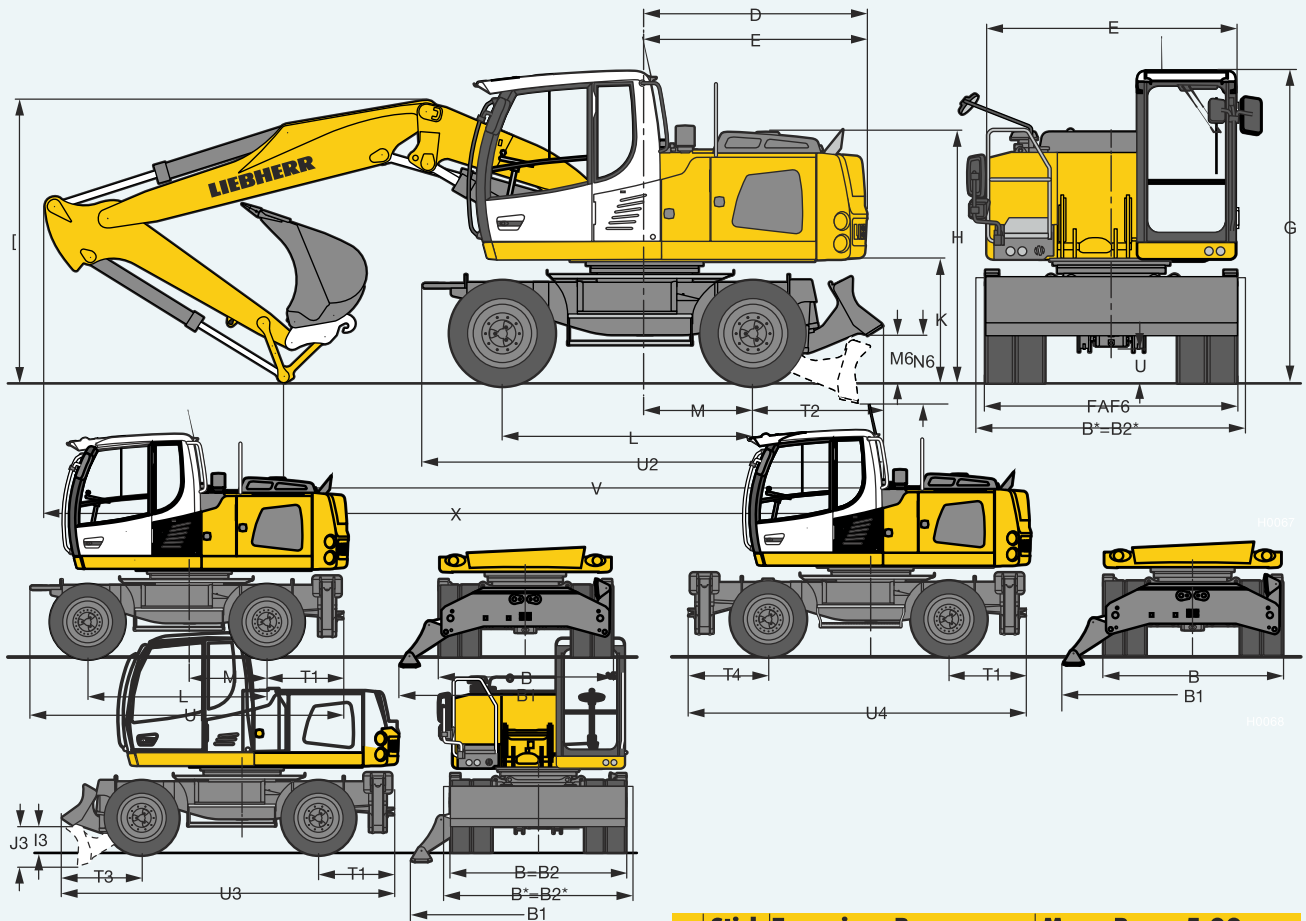

	mm
A	2,520
B	2,550
B*	2,750
B1	3,692
B2	2,550
B2*	2,750
C	3,158
D	2,250
E	2,270
H	2,540
I2	424
I3	380
J2	605
J3	585
K	1,230
L	2,540
M	1,100
Q	350
T1	1,047
T2	1,310
T3	1,153
T4	1,097
U1	4,390
U2	4,575
U3	4,740
U4	4,684

* EW-Undercarriage
E = Tail radius
Tires 10.00-20

	Stick Two-piece Boom 3.40 m				Mono Boom 5.00 m			
	stabil. blade	2 pt. outr.	blade + 2 pt. outr.	blade outr.	stabil. blade	2 pt. outr.	blade + 2 pt. outr.	4 pt. outr.
	m	mm	mm	mm	mm	mm	mm	mm
V	2.25	6,000	5,850	5,850	5,700	5,600	5,600	5,600
	2.45	5,750	5,650	5,650	5,350	5,250	5,250	5,550*
	2.65	5,600	5,550	5,550	5,200	5,150	5,150	5,450*
W	2.25	3,000	3,000	3,000	3,150	3,150	3,150	3,150
	2.45	3,000	3,000	3,000	3,050	3,050	3,050	3,050*
	2.65	3,050	3,050	3,050	3,150	3,150	3,150	3,150*
X	2.25	8,550	8,450	8,450	8,450	8,400	8,400	8,400
	2.45	8,550	8,450	8,450	8,450	8,350	8,350	8,650*
	2.65	8,500	8,400	8,400	8,450	8,400	8,400	8,700*

	Stick Offset Two-piece Boom 3.60 m			Offset Mono Boom 4.90 m			
	stabil. blade	2 pt. outr.	blade + 2 pt. outr.	stabil. blade	2 pt. outr.	blade + 2 pt. outr.	
	m	mm	mm	mm	mm	mm	
V	2.25	6,450	6,350	6,350	5,800	5,700	5,700
	2.45	6,200	6,050	6,050	5,500	5,450	5,450
	2.65	-	-	-	5,250	5,150	5,500*
W	2.25	3,100	3,100	3,100	3,050	3,050	3,050
	2.45	3,150	3,100	3,100	3,100	3,100	3,100
	2.65	-	-	-	3,050	3,050	3,050*
X	2.25	8,700	8,600	8,600	8,400	8,300	8,300
	2.45	8,700	8,600	8,600	8,400	8,300	8,300
	2.65	-	-	-	8,400	8,300	8,650*

Dimensions are with attachment over steering axle
* Attachment over digging axle for shorter transport dimensions