


ŠVESTKA

DEMOLICE • ZEMNÍ PRÁCE • NADROZMĚRNÁ PŘEPRAVA • MOBILNÍ JEŘÁBY • DOPRAVA • RECYKLACE

Dimensions CAT 5080

All dimensions are approximate.

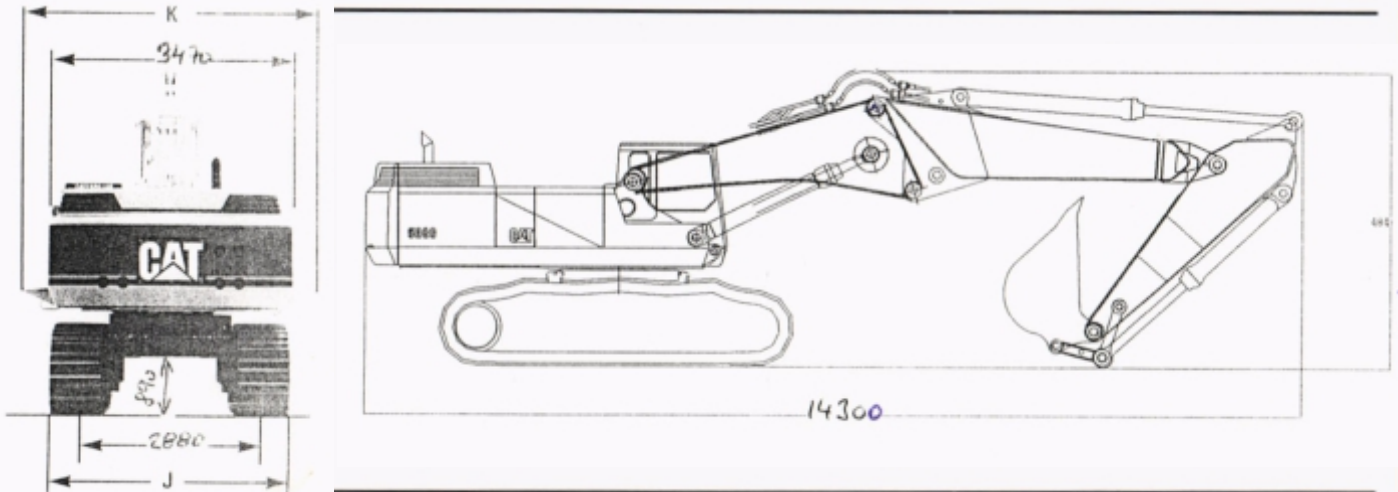

mm		mm		mm	
A	Shipping height (with bucket)	B	Shipping length	C	Track width retracted
	Mass Excavation boom 7250 mm		Mass Excavation boom 7250 mm		650 mm shoes 3400
	2920 mm stick 4782		2920 mm stick 13 470		750 mm shoes 3500
	3400 mm stick 4942		3400 mm stick 13 474		900 mm shoes 3840
	General Purpose boom 8400 mm		General Purpose boom 8400 mm	D	Track length
	3400 mm stick 4960		3400 mm stick 14 633		385C/385C L 5840/6360
	4400 mm stick 5146		4400 mm stick 14 602	E	Length to centers of roller
	5500 mm stick 5736		5500 mm stick 14 398		385C/385C L 4600/5120
	Reach boom 10 000 mm		Reach boom 10 000 mm	F	Tail swing radius 4590
	4400 mm stick 4937		4400 mm stick 16 233	G	Ground clearance 890
	5500 mm stick 5357		5500 mm stick 16 171	H	Body height 3460
				J	Cab height 3760
				K	Body width* 3470
				L	Track gauge
					extended 3510
					retracted 2750
				M	Counterweight clearance 1580

* No mirrors or handrails

Drive

Maximum Travel Speed	4.4 km/h
Maximum Drawbar Pull	592 kN

Swing Mechanism

Swing Speed	6.5 rpm
Swing Torque	204.5 kNm

Track

385C	
standard	650 mm
optional	750 mm
385C L	
standard	750 mm
optional	650, 900 mm
Number of shoes each side	
385C/385C L	47/51
Number of rollers each side	
385C/385C L	8/9
Number of carrier rollers each side	
	3

Service Refill Capacities

	Liters
Fuel Tank	1240
Cooling System	101
Engine Oil	65
Swing Drive (each)	19
Final Drive (each)	21
Hydraulic system (including tank)	995
Hydraulic tank	810