


# ŠVESTKA

DEMOLICE • ZEMNÍ PRÁCE • NADROZMĚRNÁ PŘEPRAVA • MOBILNÍ JEŘÁBY • DOPRAVA • RECYKLACE

**HYUNDAI** **200w**  
HEAVY INDUSTRIES CO.,LTD.

## Dimensions

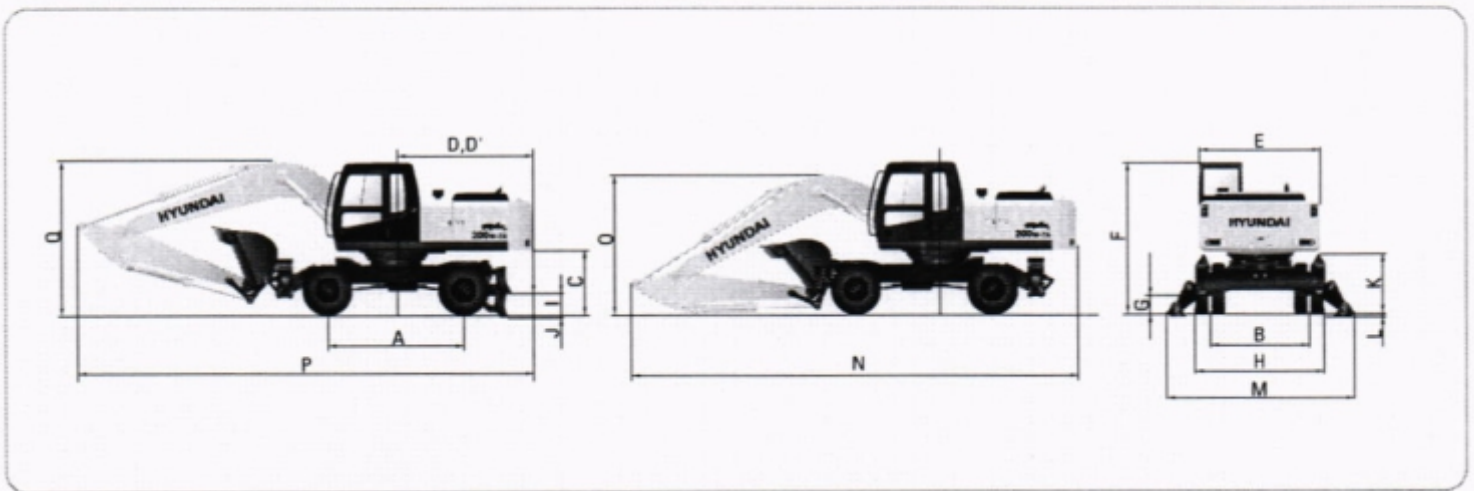

		mm (ft · in)
A	Wheel base	2,800(9' 2")
B	Tread	1,874(6' 2")
C	Ground clearance of counterweight	1,305(4' 3")
D	Tail swing radius	2,800(9' 2")
D'	Rear-end length	2,765(9' 1")
E	Overall width of upperstructure	2,530(8' 4")
F	Overall height of cap	3,180(10' 5")
G	Min. ground clearance	345(1' 2")
H	Overall width of lower structure	2,490(8' 2")
I	Ground clearance of blade up	445(1' 6")
J	Depth of blade down	125(4.9")
J	Height of blade	610(2' 0")
J	Width of blade	2,490(8' 2")
K	Ground clearance of outrigger up	1,220(4' 0")
L	Depth of outrigger down	120(4.7")
M	Overall width of outrigger	3,770(12' 4")

		mm (ft · in)		
	Boom length	※ 5,650 (18' 6")		
	Arm length	2,000 (6' 7")	2,400 (7' 10")	※ 2,900 (9' 6")
N	Shipping length of boom	9,610 (31' 6")	9,510 (31' 2")	9,490 (31' 2")
O	Shipping height of boom	3,360 (11' 10")	3,250 (10' 8")	3,100 (10' 2")
P	Traveling length of boom	9,620 (31' 7")	9,540 (31' 4")	9,520 (31' 3")
Q	Traveling height of boom	3,540 (11' 7")	3,540 (11' 7")	3,410 (11' 2")

※ Standard Equipment